

# A Review: Face Recognition Algorithms

<sup>1</sup>Mr. P.S. Desai, <sup>2</sup>Mr. Gautam M. Lodha

<sup>1</sup>Assistant Professor, <sup>2</sup>Assistant Professor

<sup>1</sup>Information Technology, <sup>2</sup>Computer Engineering

<sup>1</sup>SNJB's Late Sau. K.B. Jain COE, Chandwad, India, <sup>2</sup>SNJB's HHJB Polytechnic, Chandwad, Nashik

## Abstract

Face Recognition has always been a fascinating research area. It has drawn the attention of many researchers because of its various potential applications such as security systems, entertainment, criminal identification etc. The purpose of this paper was to produce a review of the face detection and face recognition literature as comprehensive as possible.

**Index Terms** - Image Processing, Face Recognition, ICA, IPCA

## 1. INTRODUCTION

Face recognition is one of the most relevant applications of image analysis. It's a true challenge to build an automated system which equals human ability to recognize faces. Although humans are quite good identifying known faces, we are not very skilled when we must deal with a large amount of unknown faces. The computers, with an almost limitless memory and computational speed, should overcome human limitations. Today, we have a variety of biometric techniques like fingerprints, iris scans, and speech recognition etc. but among of them face recognition is still most common technique which is in use. It is only due to the fact that it does not require aid or consent from the test subject and easy to install in airports, multiplexers and other places to recognize individuals among the crowd.


The technologies using face recognition techniques have also evolved through the years now days diverse enterprises are using face recognition in their products one good example could be entertainment business. Products like Microsoft's Project Natal or Sony's PlayStation Eye will use face recognition. It will allow a new way to interact with the machine. The idea of detecting people and analyzing their gesture is also being used in automotive industry. Companies such as Toyota are developing sleep detectors to increase safety. These and other applications are raising the interest on face recognition. It's narrow initial application area is being widened.

The challenges of facial recognition in the visible spectrum include reducing the impact of variable lightning and detecting a mask or photograph. Some facial recognition systems may require a stationary or posed user in order to capture image through many systems, though many systems use a real time process to detect a person's head and locate the face automatically.

Most research on face recognition falls into two main categories (Chellappa et al., 1995): feature-based and holistic. Geometric approaches dominated in the 1980's where simple measurements such as the distance between the eyes and shapes of lines connecting facial features were used to recognize faces, while holistic methods became very popular in the 1990's with the well-known approach of Eigen-faces .

## 2. SYSTEM STRUCTURE

The input of a face recognition system is always an image or video stream. The output is an identification or verification of the subject or subjects that appear in the image or video. Some approaches define a face recognition system as a three step process - see Figure 1.

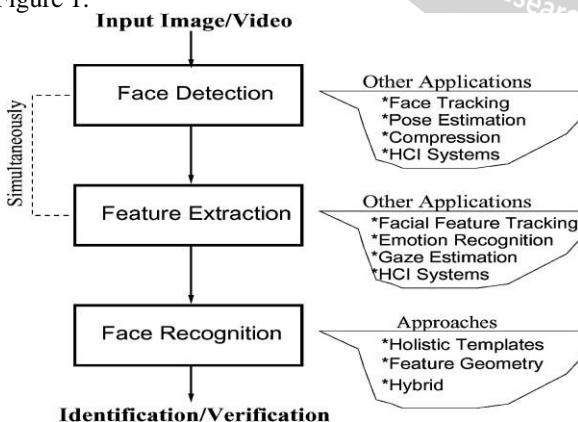

**Figure 1: Face recognition structure [11]**

Finally, the system does recognize the face. In an identification task, the system would report an identity from a database. This phase involves a comparison method, a classification algorithm and an accuracy measure. This phase uses methods common to many other areas which also do some classification process -sound engineering, data mining et al. These phases can be merged, or new ones could be added. Therefore, we could find many different engineering approaches to a face recognition problem. Face detection and recognition could be performed in tandem, or proceed to an expression analysis before normalizing the face.

### 3. LITERATURE SURVEY

The method for acquiring face images depends upon the underlying application. For instance, surveillance applications may best be served by capturing face images by means of a video camera while image database investigations may require static intensity images taken by a standard camera. Some other applications, such as access to top security domains, may even necessitate the forgoing of the nonintrusive quality of face recognition by requiring the user to stand in front of a 3D scanner or an infra-red sensor. Therefore, depending on the face data acquisition methodology, face recognition techniques can be broadly divided into three categories: methods that drive on concentration images, those that deal with video sequences, and those that require other sensory data such as 3D information or infrared images. The following discussion sheds some light on the methods in each category and attempts to give an idea of some of the benefits and drawbacks of the schemes mentioned therein in general.

#### 3.1 FEATURE-BASED FACE DETECTION

Feature-based approaches first process the input image to identify and extract (and measure) characteristic facial features such as the eyes, mouth, nose, etc., as well as other fiducial marks, and then compute the geometric relationships among those facial points, thus reducing the input facial image to a vector of geometric features. Standard arithmetic pattern recognition techniques are then employed to match faces using these measurements[5].

Early work carried out on automated face recognition was mostly based on these techniques. One of the earliest such attempts was by Kanade, who employed simple image processing methods to extract a vector of 16 facial parameters- which were ratios of distances, areas and angles (to compensate for the varying size of the pictures) -and used a simple Euclidean distance measure for matching to realize a peak show of 75% on a database of 20 different people using 2 images per person (one for reference and one for testing). More sophisticated feature extraction techniques involve deformable templates, Hough transform methods, Reisfeld's symmetry operator and Graf's filtering and morphological operations. Another well-known feature-based approach is the elastic bunch graph matching method proposed by Wiskottet al[11] . This technique is based on vibrant Link Structures. The main advantage offered by the featured-based techniques is that since the extraction of the feature points precedes the analysis done for matching the image to that of a known entity, such methods are relatively robust to position variations in the input image. In principle, feature-based schemes can be made invariant to size, orientation and/or lighting [5].

#### 3.2 HOLISTIC BASED FACEDETECTION

Holistic approaches attempt to identify faces using global representations, i.e., descriptions based on the entire image rather than on local features of the face. These schemes can be subdivided into two groups: statistical and AI approaches. An overview of some of the methods in these categories follows.

##### 3.2.1 STATISTICAL

In the simplest version of the holistic approaches, the image is represented as a 2D array of force values and recognition is performed by direct correlation comparisons between the input face and all the other faces in the database [5]. Sirovich and Kirby were the first to utilize Principal Components Analysis (PCA) to cost-effectively represent face images [12]. They demonstrated that any particular face can be efficiently represented along the Eigen pictures coordinate space, and that any face can be in the region of reconstructed by using just a small collection of Eigen pictures and the corresponding projections ('coefficients') along each Eigenpicture.

##### 3.2.2 AI

AI approaches utilize tools such as neural networks and machine learning techniques to recognize faces. In, 50 principal components were extracted and an auto-associative neural network was used to decrease those components to five dimensions. A standard multi-layer perception was exploited to classify the resulting representation. Though favorable results were received, the database used for training and testing was quite simple: the pictures were manually aligned, there was no lighting variation, tilting, or rotation, and there were only 20 people in the database [5]. The main advantage of the holistic approaches is that they do not destroy any of the information in the images by concentrating on only limited regions or points of interest, several of holistic algorithms have been modified and/or enhanced to compensate for such variations, and dimensionality reduction techniques have been exploited (note that even though such techniques increase generalization capabilities, the downside is that they may potentially cause the loss of discriminative information), as a result of which these approaches appear to produce better recognition results than the feature-based ones in general[5].

### 3.3 HOLISTIC BASED SINGLE CLASSIFIER SYSTEMS

#### 3.3.1 Principal Component Analysis (PCA) Approach

PCA calculates the Eigen vectors of the covariance matrix, and projects the original data onto a lower dimensional feature space, which is defined by Eigen vectors with large Eigen values[13]. PCA has been used in face representation and recognition where the Eigen vectors calculated are referred to as Eigen faces. Eigen faces have been used to track human faces. They use a principal component analysis approach to store a set of known patterns in a compact subspace representation of the image space, where the subspace is spanned by the Eigen vectors of the training image set [10]. PCA is a useful statistical technique that has found application in fields such as face recognition and image compression, and is a common technique for finding patterns in data of high dimension. The basic goal is to implement a simple face recognition system, based on well-studied and well-understood methods. One can choose to go into depth of one and only one of those methods. The method to be implemented is the PCA (Principle Component Analysis). It is one of the more successful techniques of face recognition and easy to understand and describe using mathematics. This method involves using Eigen faces. The first step is to produce a feature detector (dimension



reduction). Principal Components Analysis (PCA) was chosen because it is the most efficient technique, of dimension reduction, in terms of data compression [12, 15]. This allows the high dimension data, the images, to be represented by lower dimension data and so hopefully reducing the complexity of grouping the images. The basic benefit in PCA is to reduce the dimension of the data. No data redundancy as components is Orthogonal. With help of PCA, complexity of grouping the images can be reduced. Application of PCA in the prominent field of criminal investigation is beneficial. CA also benefits entrance control in buildings, access control for computers in general, for automatic teller machines in particular, day-to-day affairs like withdrawing money from bank account, dealing with the post office, passport verification, and identifying the faces in a given databases. PCA computes means, variances, covariance, and correlations of large data sets PCA computes and ranks principal components and their variances[4].

### 3.3.2 INCREMENTAL PRINCIPAL COMPONENT ANALYSIS(IPCA)

A shortcoming of the training process for PCA is that the entire training dataset images must be available beforehand in order to start the training process. This defect is elegantly handled by Incremental PCA (IPCA) methods which allow adding new images and updating the PCA representation accordingly; thus offering the great benefit of dispensing with the recently added images after model update. Incremental PCA methods have been studied by several researchers [3, 6]. Ref [3] presented a weighted and robust incremental method for subspace learning based on incremental method, which sequentially updates the principal subspace. In this method, the starting state can be obtained by two approaches:

- (1) Batch PCA is applied on an initial set of images to obtain the average images, the eigenvectors, and the weight coefficients;
- (2) The first training image is used to set the initial Eigen space, thus the algorithm is fully incremental from the start. The incremental methods proposed in [6,8] are tailored for temporally weighted learning allowing newer images to have a larger influence on the estimation of the current subspace than the older ones. Ref [8] studied incremental learning for online face recognition and proposed new approach to face recognition in which not only a classifier but also a feature space of input variables is erudite incrementally to adapt to incoming training samples; as suggested, a benefit of this type of incremental learning is that the search for useful features and the learning of an optimal decision boundary are carried out in an online fashion. Incremental PCA algorithms that compute the principal components without computing the covariance matrix are presented in [3, 6, 8, and 9].

### 3.3.3 INDEPENDENT COMPONENT ANALYSIS (ICA)

In ICA the general idea is to separate the signals, assuming that the original underlying source signals are mutually independently distributed. Due to the field's relatively young age, the distinction between BSS and ICA is not fully clear. When regarding ICA, the basic framework for most researchers has been to assume that the mixing is instantaneous and linear, as in infomax[14]. ICA is often described as an extension to PCA that uncorrelated the signals for higher order moments and produces a non orthogonal basis.

## 3.4 HOLISTIC BASED MULTIPLE CLASSIFIER SYSTEM

Since the performance of any classifier is more sensitive to some factors and relatively invariant to others, a recent trend has been to combine individual classifiers in order to integrate their complementary information and thereby create a system that is more robust than any individual classifier to variables that complicate the recognition task. Such systems have been termed as multiple classifier systems (MCSs) and are a very active research area at present. Examples of such approaches proposed for face recognition include the following: Lu et al. fused the results of PCA, ICA and LDA using the sum rule and RBF network-based integration strategy ; Marcialis and Roli combined the results of the PCA and LDA algorithms ; Achermann and Bunke utilized simple fusion rules (majority voting, rank sum, Baye's combination rule) to integrate the weighted outcomes of three classifiers based on frontal and profile views of faces; Tolba and Abu-Rezq employed a simple grouping rule for fusing the decisions of RBF and LVQ networks; Wan et al. used a SVM and HMM hybrid model; Kwak and Pedrycz divided the face into three regions, applied the Fisher faces method to the regions as well as to the whole face and then integrated the classification results using the Choquet fuzzy integral ; Haddadnia et. al. used PCA, the Pseudo Zernike Moment Invariant (PZMI) and the Zernike Moment Invariant (ZMI) to extract feature vectors in parallel, which were then classified concurrently by separate RBF neural networks and the outputs of these networks were then combined by a majority rule to determine the final identity of the individual in the input image[5][16].

## 4. REFERENCES

- [1] Issam Dagher and Rabih Nachar, -Face Recognition Using IPCA-ICA Algorithm, IEEE Transactions On Pattern Analysis And Machine Intelligence, Vol. 28, No. 6, June 2006.
- [2] Issam Dagher, William Koberly, and Wassim Abi Nader, -Research Article Human Hand Recognition Using IPCA-ICA Algorithm, Hindawi Publishing Corporation EURASIP Journal on Advances in Signal Processing Volume 2007, Article ID 91467, 7 pages doi:10.1155/2007/91467
- [3] Haitao Zhao, Pong Chi Yuen, Member, IEEE, and James T. Kwok, Member, IEEE, -A Novel Incremental Principal Component Analysis and Its Application for Face Recognition, IEEE Transactions On Systems, Man, And Cybernetics—Part B: Cybernetics, Vol. 36, No. 4, August 2006
- [4] Ion Marqués, -Face Recognition Algorithms, Proyecto Fin de Carrera June 16, 2010
- [5] Rabia Jafri and Hamid R. Arabnia, -A Survey of Face Recognition Techniques, Journal of Information Processing Systems, Vol. 5, No. 2, June 2009 , page no.41-67

[6]Tat-Jun Chin and David Suter, Senior Member, IEEE , „ Incremental Kernel Principal Component Analysis“ , IEEE Transactions On Image Processing, Vol. 16, No.6, June 2007

[7]Marian Stewart Bartlett, Member, IEEE, Javier R. Movellan, Member, IEEE, and Terrence J. Sejnowski, Fellow,IEEE, „Face Recognition by Independent Component Analysis“, IEEE Transactions On Neural Networks, Vol. 13, No. 6, November2002

[8]Hatim A. Aboalsamh , Hassan I. Mathkour , Ghazy M.R. Assassa, Mona F.M. Mursi, „Face Recognition using Incremental Principal Components Analysis“, International Conference on Computing, Engineering and Information , 978-0-7695 3538-8/09 \$26.00 © 2009 IEEE DOI10.1109/ICCEIS.2009.56

[9]Juwei Lu, Student Member, IEEE, Konstantinos N. Plataniotis, Member, IEEE, and Anastasios N. Venetsanopoulos, Fellow, IEEE , „Face Recognition Using Kernel Direct Discriminant AnalysisAlgorithms“, IEEE Transactions On Neural Networks, Vol. 14, No. 1, January 2003

[10]Jin Wang, Armando Barreto, Naphtali Rishe, Jean Andrianand MalekAdjouadi, „a fast incremental multilinear principal component analysis algorithml , International Journal of Innovative Computing, Information and Control ICIC International c!2011 ISSN 1349-4198Volume7,Number10,October2011,pp. 6019–6040

[11]W. ZHAO , R. CHELLAPPA , P. J. PHILLIPS AND A. ROSENFELD, „FaceRecognition:A Literature Survey“, ACM Computing Surveys, Vol. 35, No. 4, December 2003, pp. 399–458. [12] Brian C. Becker , Enrique G.ortiz, „EvaluationofFaceRecognitionTechniquesfor Application to facebook— , 978-1-4244-2154- 1/08/\$25.00 ©2008IEEE

[12]Peter N. Belhumeur, Jo~ao P. Hespanha, and David J. Kriegman, „Eigenfacesvs. Fisherfaces: Recognition Using Class Specific Linear Projectionl , IEEE Transactions On Pattern Analysis And Machine Intelligence, Vol. 19, No. 7, July 1997 , Pp711-720

[13]Ganesh R. Naik and Dinesh K Kumar School of Electrical and Computer Engineering RMIT University, Australia, „An Overview of Independent Component Analysis and Its Applications“, Informatica 35 (2011)63–81

[14]SrinivasuluAsadi , Dr.Ch.D.V.Subba Rao ,V.Saikrishna, „A Comparative study of Face Recognition with Principal Component Analysis and Cross-Correlation Techniquel, International Journal of Computer Applications (0975 – 8887) Volume 10–No.8,November 2010

[15]Richard Young , „ Research Proposal Face Recognition for Security Purposes Using Modular PCA and Neural Networks“,2010

[16]Vaibhav Pathak and D.N. Patwari, P.B. Khanale, N.M. Tamboliand Vishal M .Pathak, „StudyandComparison of Different Face Recognition Algorithms“, BIOINFO Medical Imaging Volume 1, Issue 1, 2011,pp-05-09

[17]Jin Wanga, ArmandoBarreto , LuWang, YuChen , Naphtali Rishe , Jean Andrian ,MalekAdjouadi , „Multilinearprincipal component analysis for face recognition with fewer featuresl , 0925-2312/\$ - seefrontmatter& 2010 Elsevier B.V.Allrightsreserved. doi:10.1016/j.neucom.2009.08.022

[18]Hui Zhang, Jason E. Fritts , Sally A. Goldman , „ Image segmentation evaluation: A survey of unsupervised methods“, Computer Vision and Image Understanding 110 (2008)260–280

[19]MatejAttac , MatjazJogan , Ales Leonordis , Incremental PCA for on-line visual learning and recognition Jin Wang, Armando Barreto, Naphtali Rishe, Jean Andrianand MalekAdjouadi, „a fast incremental multilinear principal component analysis algorithml , International Journal of Innovative Computing, Information and Control ICIC International c!2011 ISSN 1349-4198Volume7,Number10,October2011,pp. 6019–6040

[20] P P Rewagad , P S Desai, “ Critical Review on Face Recognition “ , International Journal of Computer Applications -2013